




Clean-room manufactured optically clear mounting adhesives



Lintec Europe's double-sided mounting adhesives are constructed using the finest quality components and are manufactured in clean-room conditions to ensure superior cleanliness and consistency.




The range of optically clear mounting films ensure optimum light transmission, low haze and minimal distortion. Options include permanent/removable films for temporary graphics, five-year 99% UV blocking films and ultra-high shear outgassing-resistant adhesives for application to certain 'problem' plastics. In addition, Lintec Europe's double-sided mounting adhesives feature polyester release liners ensuring superior adhesive smoothness and cleanliness.



Thanks to their diverse product attributes, Lintec Europe's materials offer a number of uses in the graphics market; these include creation of self-adhesive constructions from photographic or inkjet printed images, as well as the capability to enhance, protect or add functionality to the printed image itself. The products are also perfectly suited for use in a plethora of industrial and automotive applications, the likes of which include backlit fascias, gaming machines and touchscreen displays.

mounting adhesives



Optically clear



Outdoor durability



Permanent adhesive



optional

Removable adhesive




Outgassing resistant



UV filtering



Product construction:

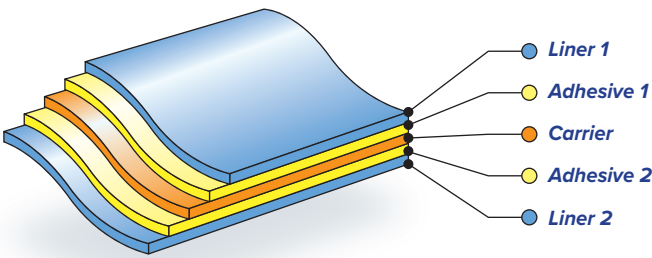

mounting adhesives

Product selector:

Product code	Liner 1	Adhesive 1	Carrier	Adhesive 2	Liner 2	Optically clear	Adhesive 1 permanent	Adhesive 2 permanent	Adhesive 2 removable	Outgassing resistant	99% UV filtering	Roll width
01-499	25µ PET	NPL	25µ clear PET	NPL	25µ PET	✓	✓	✓				1040mm 1300mm 1520mm 1829mm
E-334ZC	25µ PET	NPL	50µ clear UV block PET	NPL	25µ PET	✓	✓	✓			✓	1340mm
E-337RC	25µ PET	NPL	25µ clear PET	R51	25µ PET	✓	✓		✓			1250mm
E-338RC	25µ PET	NPL	25µ clear PET	R55	25µ PET	✓	✓		✓*			1250mm
E-339ZC	25µ PET	NPL	25µ clear PET	P182E	25µ PET	✓	✓	✓		✓		1250mm
A-357ZC	25µ PET	NPL	5 year exterior. 30µ clear UV block acrylic	P182E	25µ PET	✓	✓	✓		✓	✓	1350mm

Standard roll length 50 metres.

* Adhesive R55 offers approximately 60% lower adhesion compared to R51.

Full technical datasheets available on request.

The representations of performance and suitability for use contained in this data sheet are meant only as a guide. Since only the user is aware of the specific conditions in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for that intended use. Copyright 1995

RoHS RoHS2 compliance: This product is in compliance with European parliament directive 2011/65/EU which restricts the use of certain hazardous substances in electrical and electronic equipment.



LINTEC EUROPE

www.lintec-europe.com

European head office: LINTEC EUROPE B.V. Tel: +31 (0)20 6733 566 UK office: LINTEC EUROPE (UK) LTD. Tel: +44 (0)1628 777766

0523